

[illegible]

Figure 1 is a perspective view of a first embodiment of a device. The device consists of a main body 21(22, 23, 24) which has a cylindrical part 21a(22a, 23a, 24a) and a gear-like part 21b(22b, 23b, 24b). A component B1(B2, B3, B4) is shown interacting with the gear-like part 21b(22b, 23b, 24b).

FIG. 3

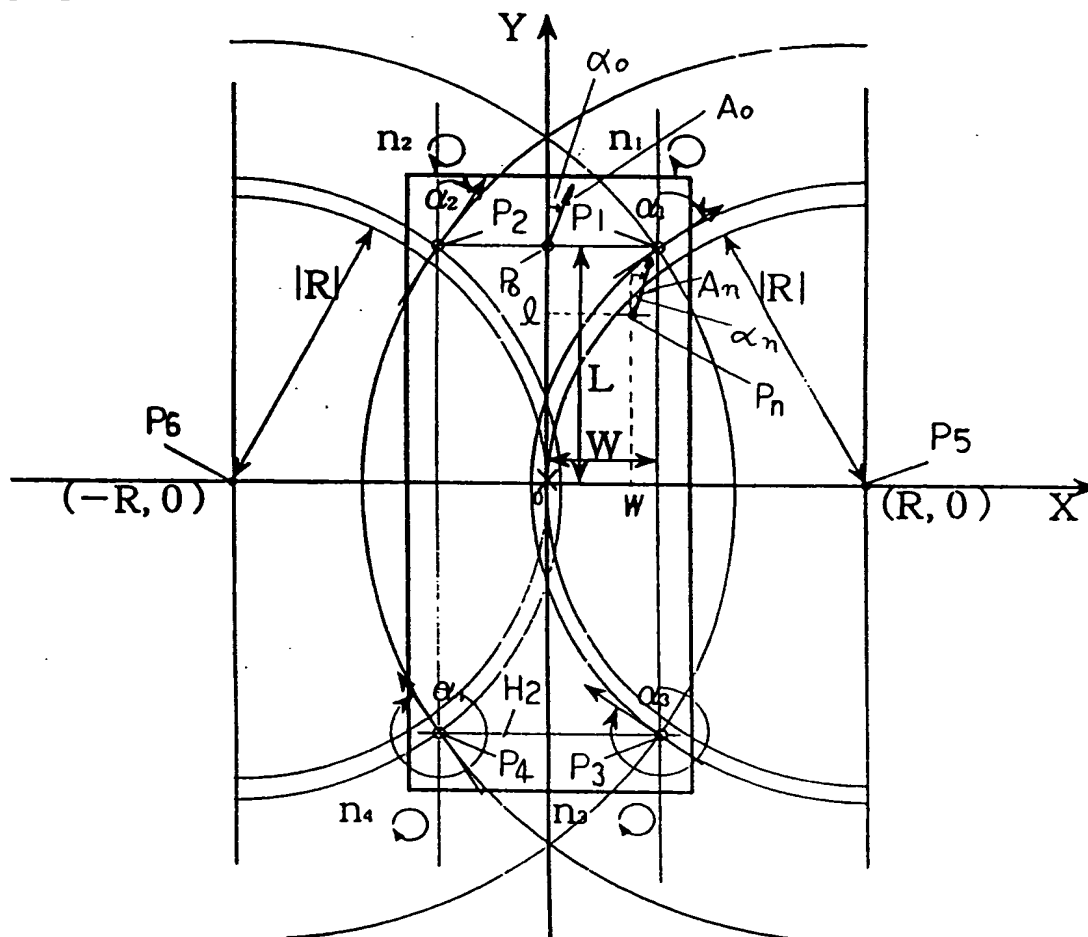


FIG. 4

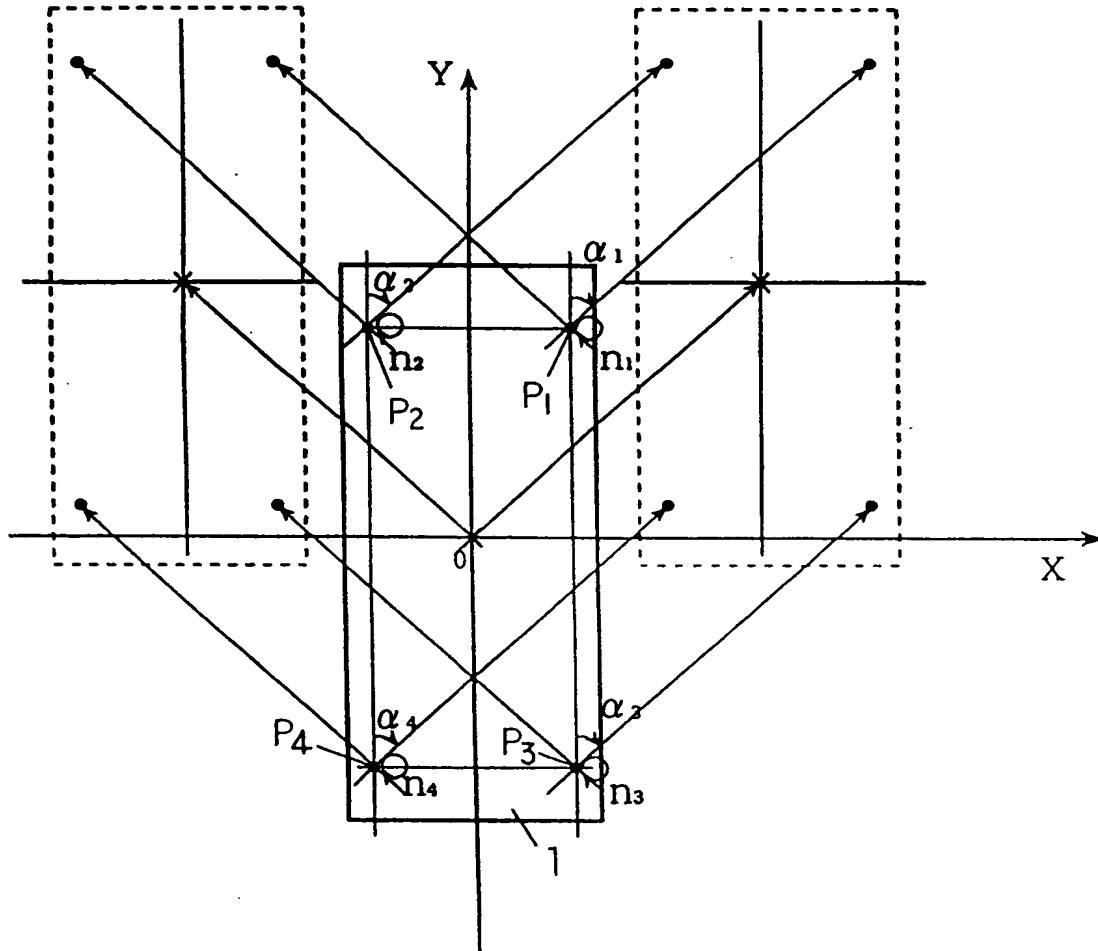


FIG. 5

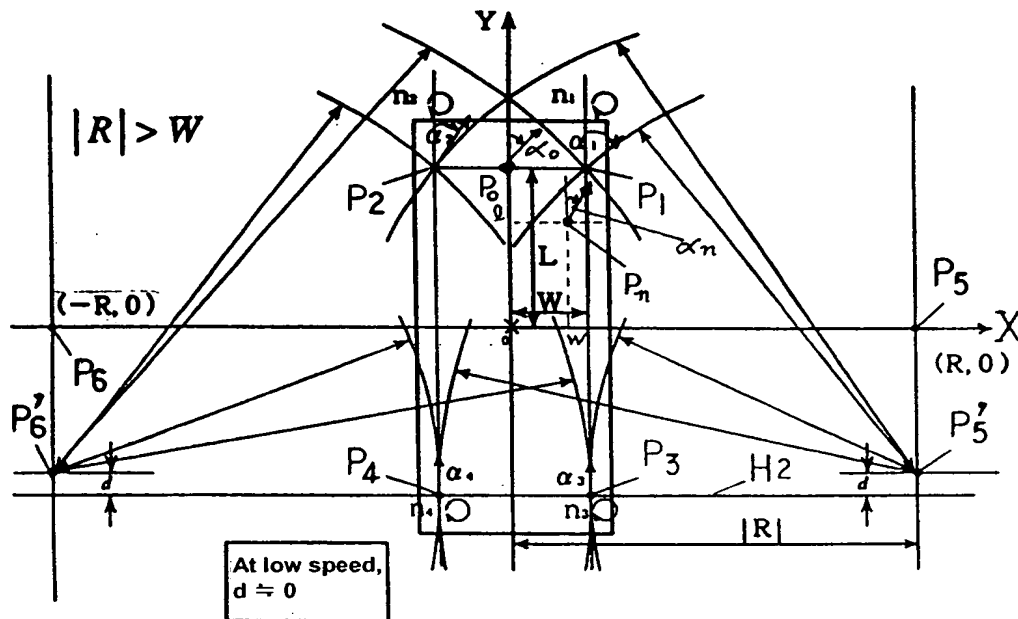


FIG. 6

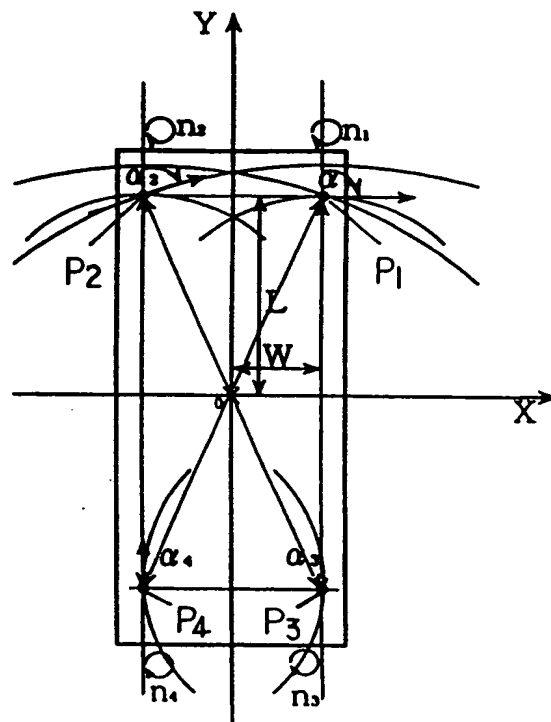


FIG. 7

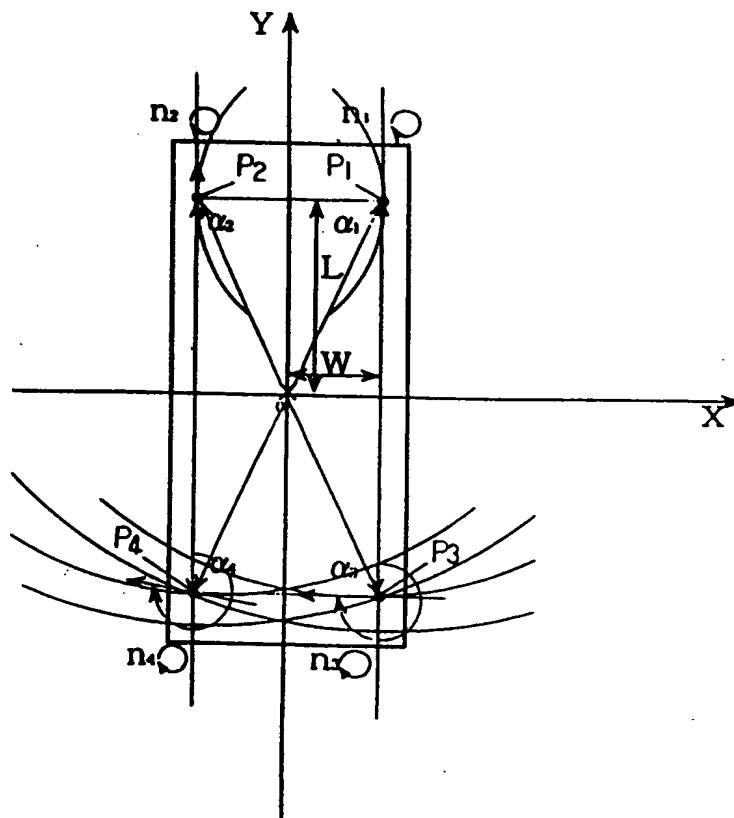


FIG. 8

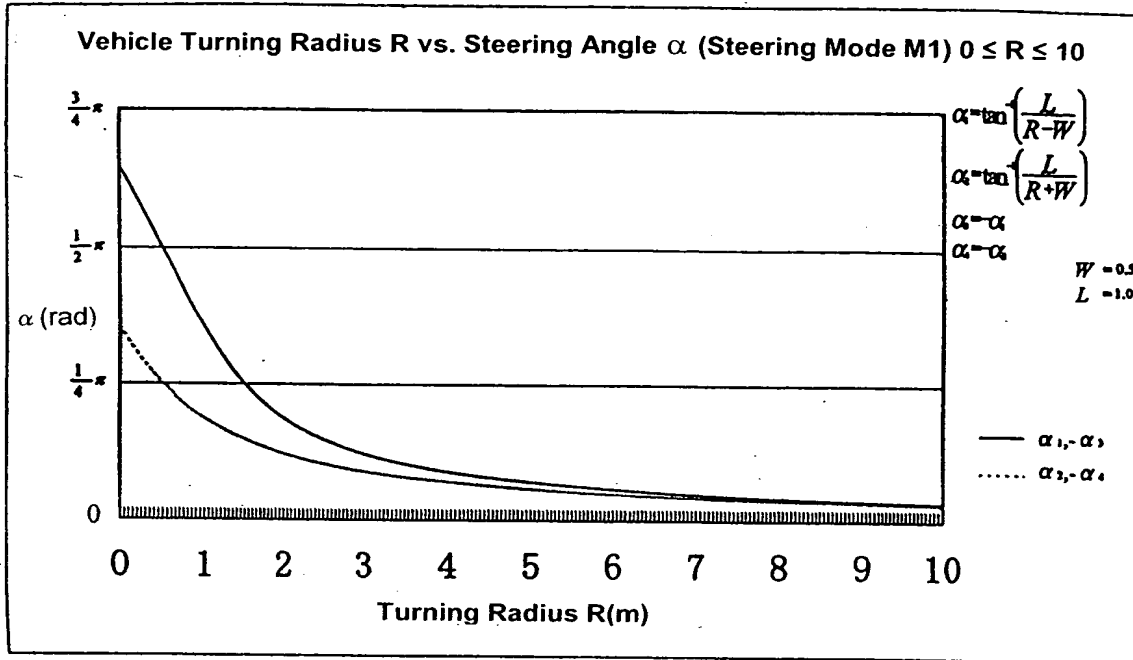


FIG. 9

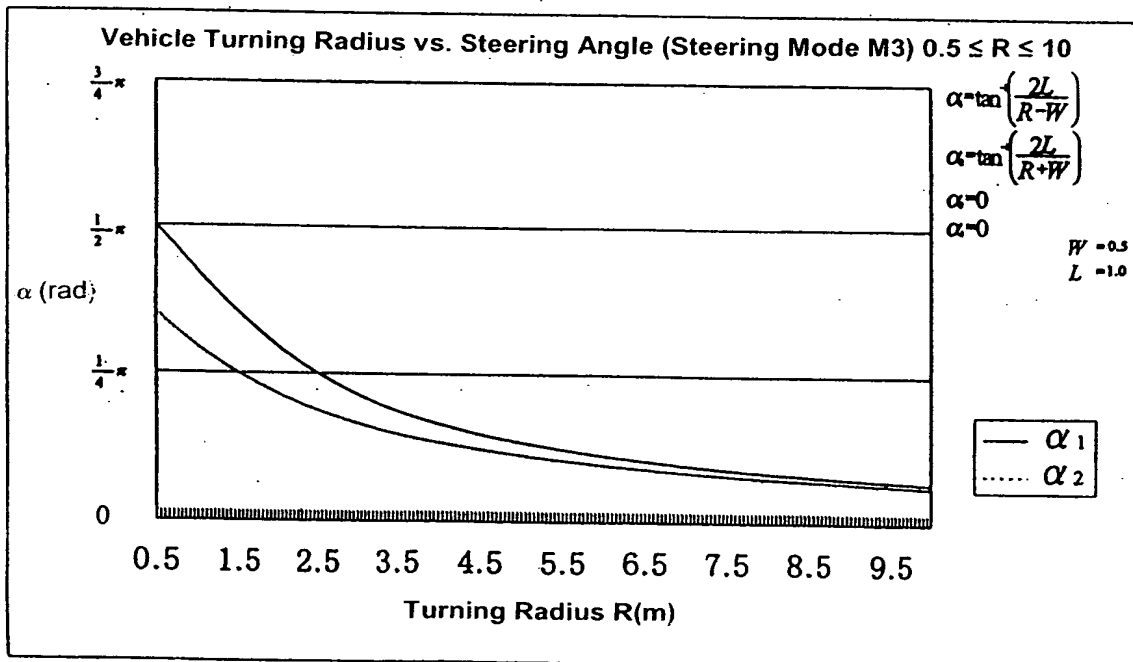


FIG. 10

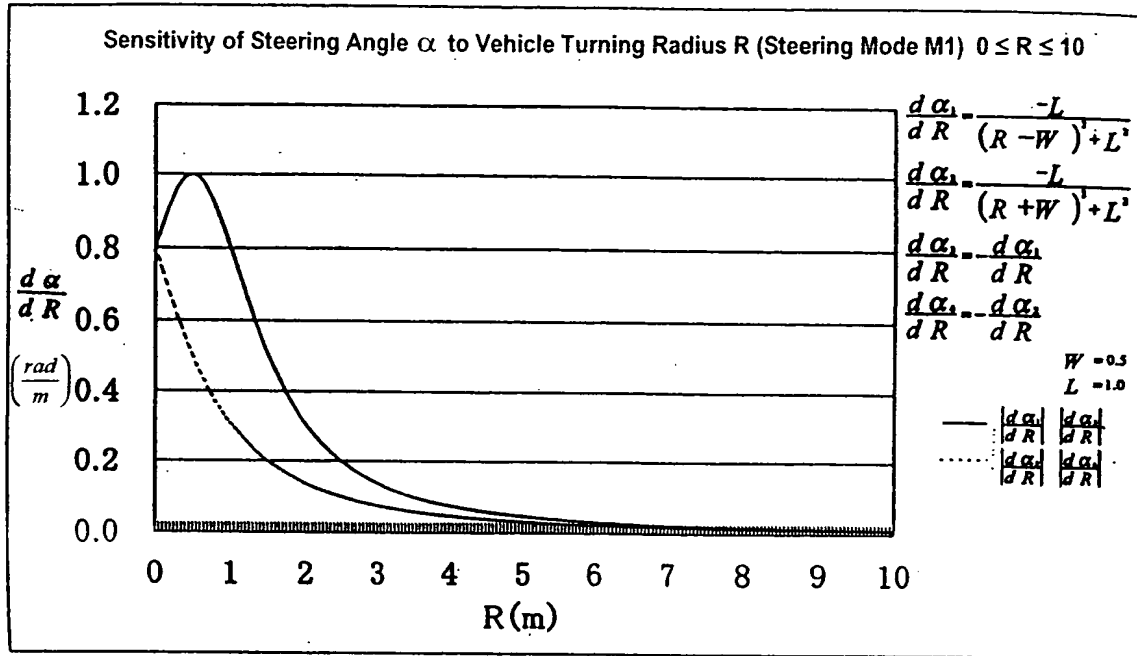


FIG. 11

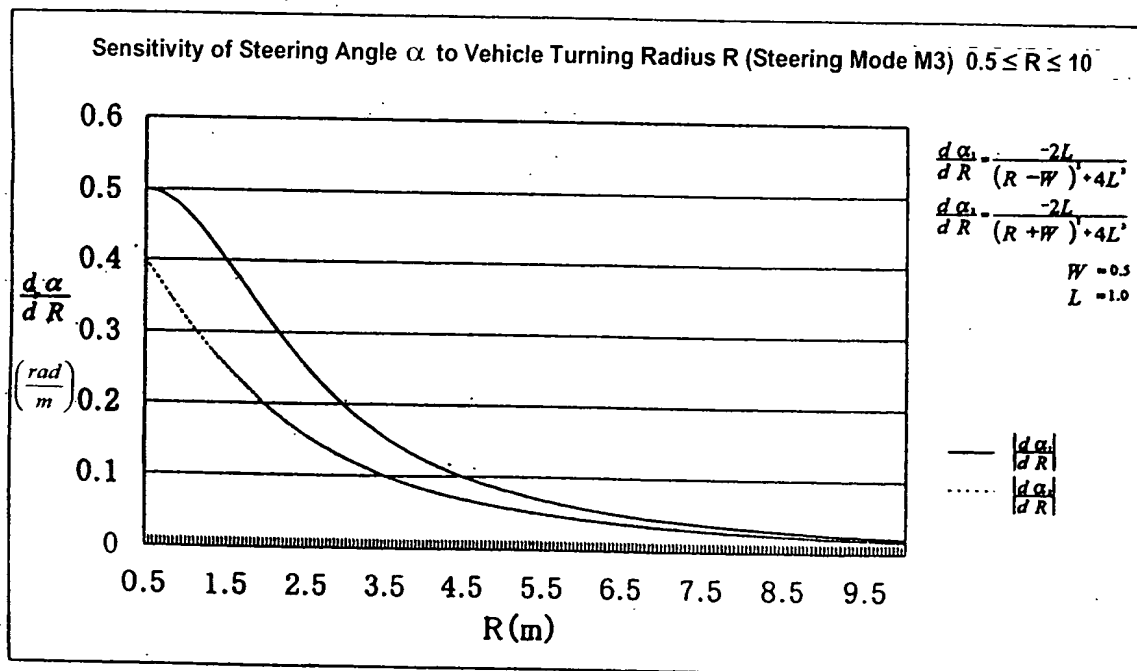


FIG. 12



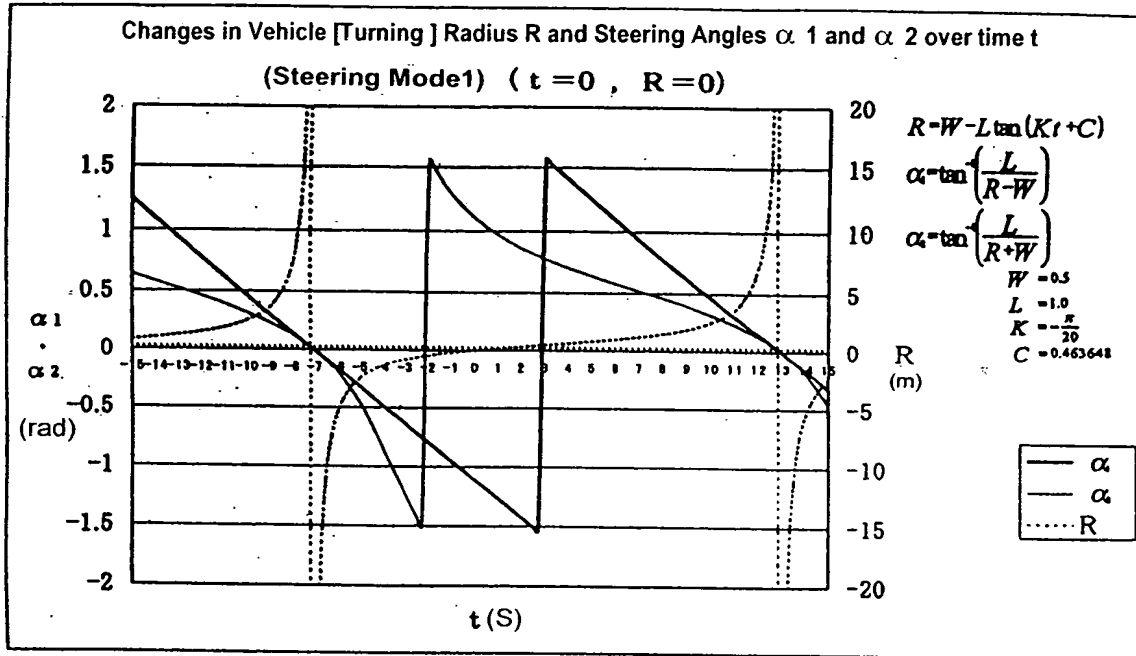


FIG. 13

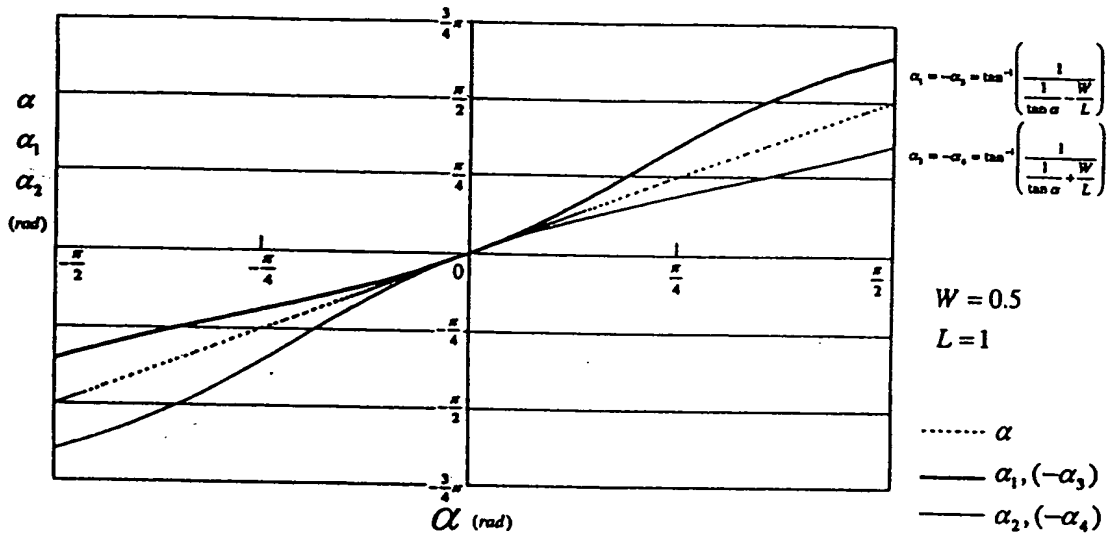

Steering Angles α_1 Through α_4 When α_0 is Used as the Steering Command Value (Steering Mode M1)

FIG. 14

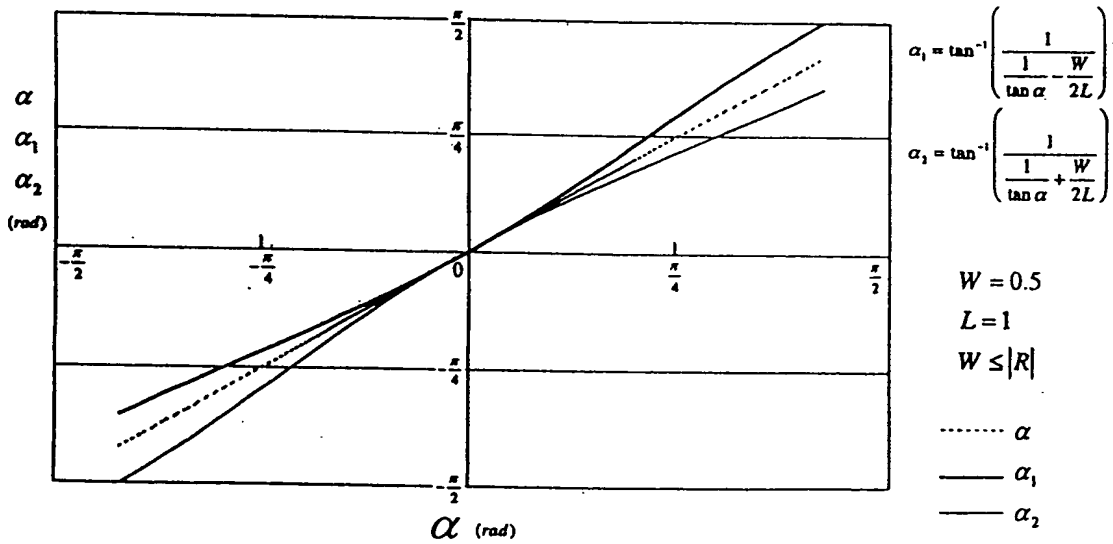

Steering Angles α_1 and α_2 When α_0 is Used as the Steering Command Value (Steering Mode M3)